



Automotive Equipment

# CLAMP ON TYRE




Wheel  
Aligner

## INNOVATIVE DESIGN

for wheel quick positioning

**NO CONTACT**  
with the rim

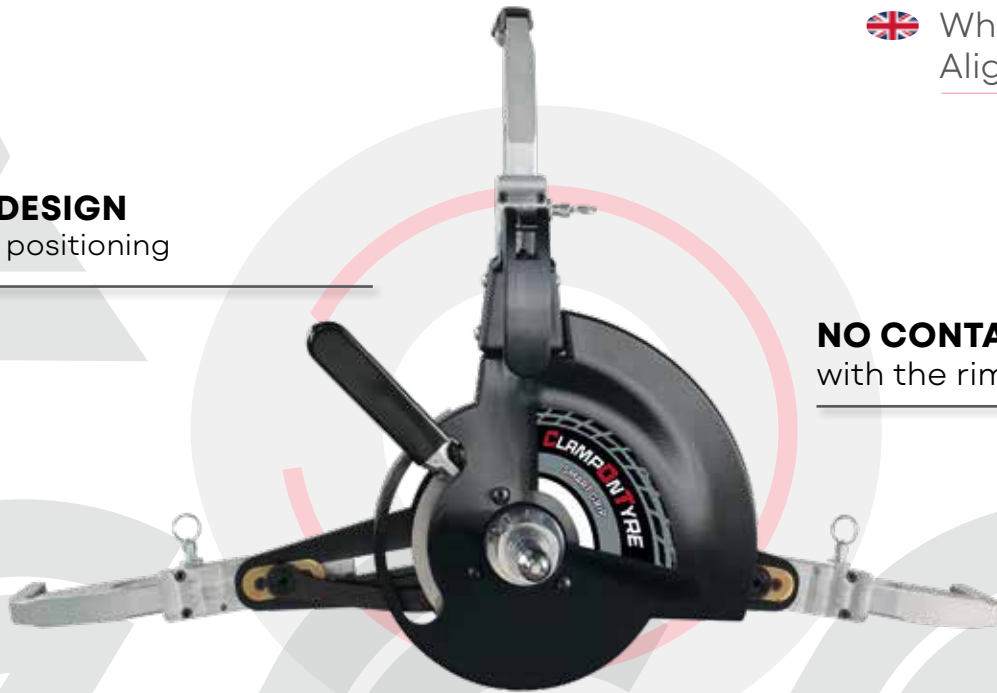

## RELIABLE AND FAST CLAMPING

thanks to the innovative coupling mechanism



## FEATURES

**Fastening to the wheel:** no contact with the rim to prevent any damage.

**Quick:** quick lever-operated mounting and demounting, without toothed gears.

**Self-centering:** the synchronous opening and closing mechanism allows the central pin to be always aligned with wheel centre. The rollers integrated inside jaws allow greater smoothness and mounting ease.

**Runout:** suitable for thrust compensation procedure of 3D aligners (\*).

**Lightweight and ergonomic:** the innovative design and low weight make it easy to handle and operate.

\* Refer to the wheel aligner catalogue to check for compatibility.

## Wheel Aligners

### TECHNICAL SPECIFICATIONS

Compatibility	3D Aligners (*)
Wheel diameter	da 19" a 39"
Rim diameter	da 10" a 30"

#### Wheel arch protection included

The set of supplied extensible jaws allows working on wheel diameter from 19" to 32"

\* Refer to the wheel aligner catalogue to check for compatibility.

### OPTIONAL ACCESSORIES



#### MULTI-PURPOSE TROLLEY

Clamp holder multi-purpose trolley and additional jaws



#### CLAMP HOLDER

Clamp holder set for wall mounting with support for additional jaws



#### VAN EXTENSIONS

Extensions set for use with vans



#### XL EXTENSIONS

Set of XL extensions for wheel diameter from 32" to 39"

The manufacturer reserves the right to modify the features of its products at any time.

Cod. DPTC000383\_11\_2022