



Automotive Equipment

C362 EF C322 EF

 Lifts

Electrohydraulic underbody double scissors type lift, for tyre specialists, car workshops, and body repairers



3600



3200



Unique arm geometry for maximum stiffness and minimised space usage.
Special **lift linkage**, for lifting loads even from the lowest lift height.



All models available in both on-floor and flush installation versions



Automotive Equipment

C362 EF - C322 EF



Lifts

Alignment of the runways with a dual MASTER/SLAVE circuit (**two cylinders per runboard**) without mechanical safety racks.




ADJUSTMENT BOLTS

Adjustment bolts with rubber to cushion the end of the stroke.

PRUNWAYS WITH SUSPENDED FLAPS

Runways with **suspended flaps** which also act as vehicle access ramps.

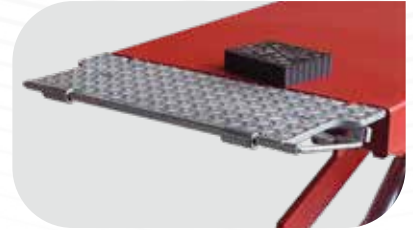

SLIDING BLOCKS

Generously sized, **self-lubricating sliding blocks**.

STANDARD ACCESSORIES

- Self-lubricating bushings on all rotating parts
- Set of 4 rubber pads

OPTIONAL ACCESSORIES


- Pair of cross pieces and pads for off-road vehicles
- Kit for pit installations

See separate catalogue for further accessories.

TECHNICAL DATA

Model	Teco C362 EF	Teco C322 EF
Lift capacity	3600 kg	3200 kg
Lifting time	45 s	
Three phase motor	400/230V - 3kW - 3Ph - 50/60Hz	
Single phase motor	230V - 3kW - 1Ph - 50/60Hz	
Max. lifting height	1890 mm	
Lift min. height	110 mm	105 mm

DIMENSIONS

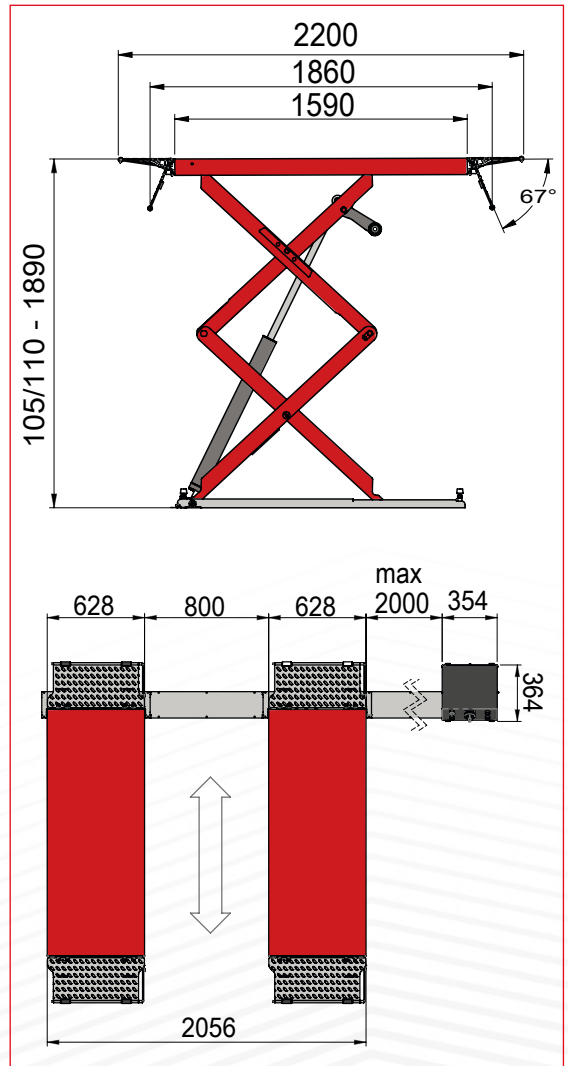

The manufacturer reserves the right to modify the features of its products at any time.

Cod. DPTC000499_06_2024



NEXION SPA - ITALY -
www.tecoautomotive.com - teco@teco.it

Designed in
ITALY

