



Automotive Equipment


C412 IE C372 IE

 Lifts

Electrohydraulic underbody scissors type lift, for tyre specialists, car workshops, and body repairers



4000 3600



Strong support of cylinder and **removable connections on base and runway** for simpler maintenance



Configuration for flush installation



Automotive Equipment

C412 IE - C372 IE



Lifts

Runboards alignment by **MASTER/SLAVE** system.




ADJUSTMENT BOLTS

Adjustment bolts with rubber to cushion the end of the stroke.

RUNWAYS WITH EXTENSION

Runway with pull-out extension.

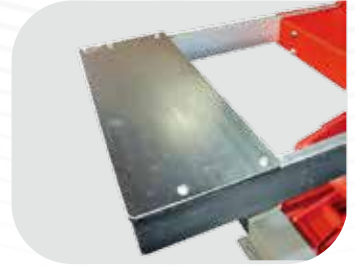

SLIDING BLOCKS

Generously sized, **self-lubricating sliding blocks**.

STANDARD ACCESSORIES

- Self-lubricating bushings on all rotating parts
- Set of 4 rubber pads

OPTIONAL ACCESSORIES

- Pair of cross pieces and pads for off-road vehicles
- Kit for pit installations

See separate catalogue for further accessories.


TECHNICAL DATA

Model	Teco C412 IE	Teco C372 IE
Lift capacity	4000 kg	3600 kg
Lifting time	45 s	
Three phase motor	400/230V - 3kW - 3Ph - 50/60Hz	
Single phase motor	230V - 3kW - 1Ph - 50/60Hz	
Max. lifting height	2010 mm	
Lift min. height	290 mm	270 mm

The manufacturer reserves the right to modify the features of its products at any time.

Cod. DPTC000505_06_2024

DIMENSIONS

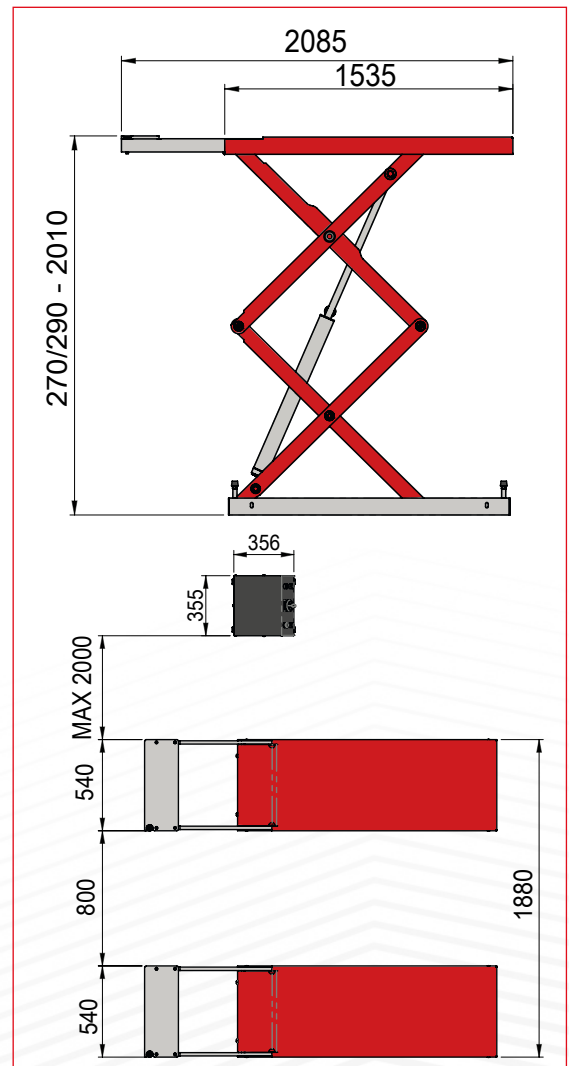

NEXION SPA - ITALY -
www.tecoautomotive.com - teco@teco.it

Designed in
ITALY

